

VALVE CORE


9-093123

Characteristics


- Protects against dirt, moisture and gradual loss of pressure
- High impermeability
- Easy to use
- High quality processing

Color coding

- For easy differentiation of valve cores in everyday work in the workshop
- No technical meaning

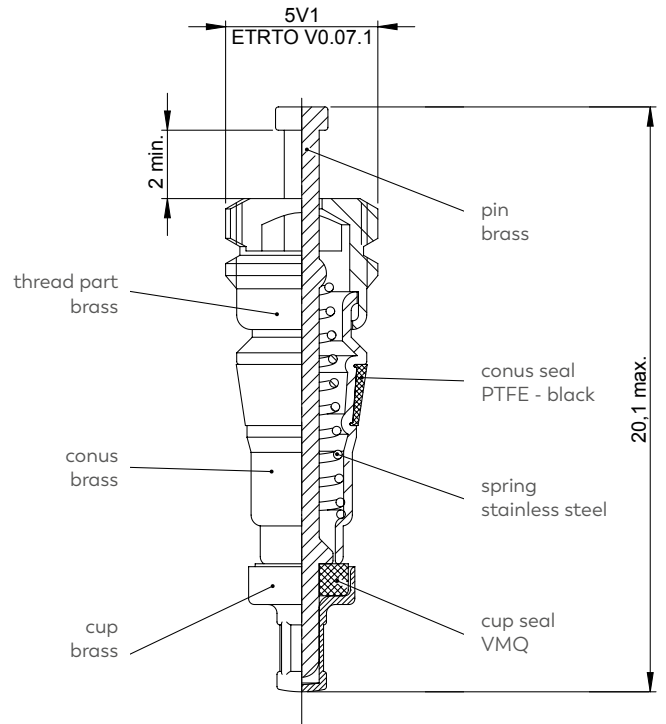

Position and tolerance of the valve insert

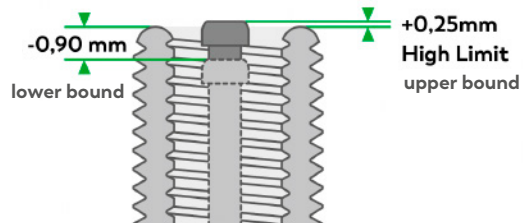

- Valve cores should be flush with the valve mouth.
- Tolerance of -0.90 and +0.25 mm is allowed.
- For TR C1 & TR C2

NOTE

- Use brass inserts only for brass valves.
- Nickel-plated inserts suitable for brass and aluminum valves.
- Recommended tightening torque: 0.23 to 0.56 Nm

Article number	9-093123
Operating pressure range	Up to 20 bar
Opening pressure	3 - 6 bar
Operating temperature range	-40 to 150 °C
Air flow at 600 kPa	9m ³ h
Resistant against	Oxygen, ozone, break fluid (based on glycol)