



With precise calibration to the perfect air pressure








With precise calibration to the perfect air pressure. Our tyre inflation device **GATOR INFLATOR MAX** is already calibrated. What does this imply? Immediate operational availability and highest quality! No additional effort, no additional fees. Simply pick it up and get started!

The tyre inflator complies with the harmonised European standard for tyre pressure gauges.


✔ Type tested

✔ Conformity tested

TECHNICAL DATA:

 Weight	800 g
 Filling medium	air / nitrogen
 Max. permissible operating pressure	16 bar / 230 psi
 Pressure gauge measurement range	0 - 12 bar / 170 psi analogue pressure gauge
 Temperature range	-20°C to +55°C
 Pressure gauge display accuracy	pm ≤ 4 bar: ±0,08 bar 4 bar < pm ≤ 10 bar: ±0,16 bar pm > 10 bar: ±0,25 bar
 Pressure gauge graduation	0,1 bar / 2 psi

EVOLUTION OF AIR CONTROL

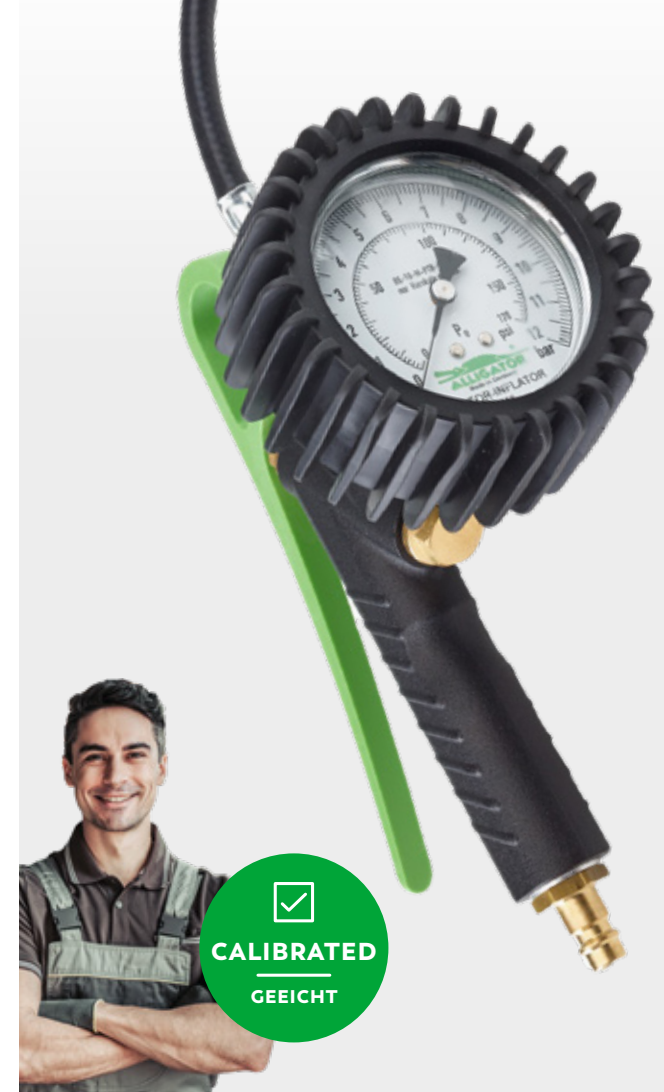

WEGMANN automotive GmbH
Rudolf-Diesel-Straße 6
97209 Veitshöchheim
Germany

Phone: +49 (0) 931-32104-0
E-Mail: info@wegmann-automotive.com
Internet: www.wegmann-automotive.com

GATOR INFLATOR MAX

The tyre filler for experts

FROM EXPERTS FOR EXPERTS

Precise. Practical. High Quality.

PRECISE

The calibrated manometer in combination with the high-quality processing of our new tyre inflator ensures precise working and reliable measurement results.

PRACTICAL

High-quality materials such as the shock-resistant sheathing of the manometer and the robust aluminium handle guarantee the durability of the device.

HIGH QUALITY

While the rotating tube enables ergonomic working, the suspension eye serves for a quick and easy storage. Additionally the operating lever was constructed for extra easy handling- ideal for working with one hand.

